FIG. 1 (PRIOR ART)

		T
USER LAYER (VOICE SERVICE, PACKET AND CIRCUIT SWITCHING DATA SERVICES)	LINK LAYER (LAC, MAC)	PHYSICAL LAYER

FIG. 2 (PRIOR ART)

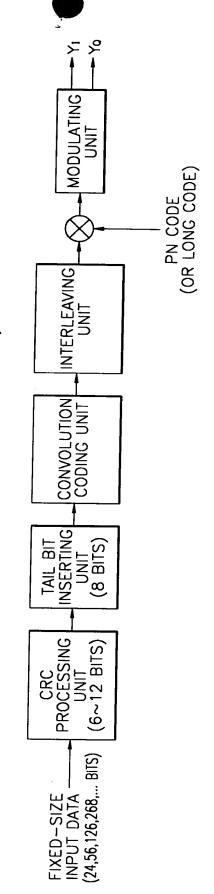


FIG. 3 (PRIOR ART)

ONE-FRAME OF DATA

-----FIXED-SIZE PACKET

FIG. 4

40	42	44	46
USER LAYER	LINK LAYER	BIT STREAM RECONFIGURATION LAYER	PHYSICAL LAYER

FIG. 6

IDENTIFIER FIELD	QoS PARAMETER FIELD	PAYLOAD DATA.	STUFFING BITS
		N × 8 BITS	

FIG. 5

